

Class 319

Electric Multiple Unit

Volume 1



Contents

How to Install.....	2
Technical Information.....	3
Liveries.....	4
Cab Guide.....	9
Keyboard Controls.....	11
Features.....	12
Passenger View.....	13
Sub-class Differences.....	16
Pantographs.....	16
Destination Roller Blind.....	17
TrainFX Destination Display.....	18
Global System for Mobile Communication-Railway (GSM-R).....	20
Driver Only Operation (DOO).....	22
Adhesion.....	23
Neutral Section Functionality.....	24
Dual Voltage Functionality.....	25
Variable Power & Brake Performance.....	25
Variable Traction Motor Volume.....	25
Thrash Mode.....	25
Isolation Switches.....	26
Coupling Procedure.....	26
Arcing Pantograph.....	27
Cold Start.....	28
Bits and Bobs.....	29
Setting up the Driver's Cab.....	30
Driving Guide.....	30
How to Use in the Scenario Editor.....	31
Numbering.....	31
Scenarios.....	34
Credits.....	35

How to Install

- 1) Locate where you have downloaded this pack and unzip it. Information on how to do this can be found [here](#).
- 2) Go to the location where you have extracted the files from the .zip file.
- 3) Now find the .exe file called 'Class 319 EMU Pack Vol 1'. Double-click this file.
- 4) Follow the steps and by the end of the process, the main part of this pack will have installed.
- 5) If you intend to use any of the included scenarios, make sure you have the freely available extra stock pack and relevant payware add-on packs listed on the product page installed so the scenarios function as intended.

Technical Information

Manufacturer	British Rail Engineering Limited (BREL) York
Years built	1987 - 1990
Number built	86 (319001 - 319060) (319161 - 319186)
Traction motors	4 x GEC G315BZ
Maximum speed	100 mph (161 km/h)
Coupling type	Tightlock
Length	19.83m (DTCO / DTSO), 19.93m (MSO / TSOL)
Height	3.58 m
Width	2.82 m
Weight	140.3 t

Liveries

First Capital Connect:

with First Capital Connect logo - *FCC*

with Thameslink logo - *Ex-FCC (TL)*



Southern:

with First Capital Connect logo - *Ex-SN (FCC)*

with Thameslink logo - *Ex-SN (TL)*



'My Switzerland' - Swiss



'Lyca Mobile' - Lyca



Thameslink White:

without PRM (Persons of Reduced Mobility) mods - *TL W*

with PRM (Persons of Reduced Mobility) mods - *TL W (PRM)*



London Midland - *LM*



Northern Rail - *NR*



Northern



Northern White - *Northern W*




Cab Guide

Driver's Side



- | | |
|--------------------------------------------|----------------------------------------------|
| 1 - TrainFX destination display | 19 - Motor Alternator (MA) indicator light |
| 2 - Brake handle | 20 - AC system select button |
| 3 - Windscreen wiper switch (left) | 21 - Door release buttons (right) |
| 4 - Door release buttons (left) | 22 - Pantograph up/traction reset button |
| 5 - Cab light button | 23 - Sander button |
| 6 - Driver's Reminder Appliance (DRA) | 24 - Door close button (right) |
| 7 - Door close button (left) | 25 - Pantograph down/DC system select button |
| 8 - Tail light switch | 26 - Couple button |
| 9 - Headlights switch | 27 - Uncouple button |
| 10 - AWS reset button | 28 - Master key/reverser |
| 11 - Main reservoir & brake cylinder gauge | 29 - Power handle |
| 12 - Car reminder slider | 30 - GSM-R |
| 13 - Speedometer | 31 - AWS sunflower |
| 14 - Horn | 32 - Centre door blind |
| 15 - Driver to guard bell | 33 - Driver's blind |
| 16 - Cab door open button (left) | 34 - Cab Secure Radio (CSR) (inactive) |
| 17 - Cab door close button (left) | 35 - Destination blind cupboard |
| 18 - Line light indicator | 36 - Emergency Bypass Switch (EBS) |


Non-driver's Side

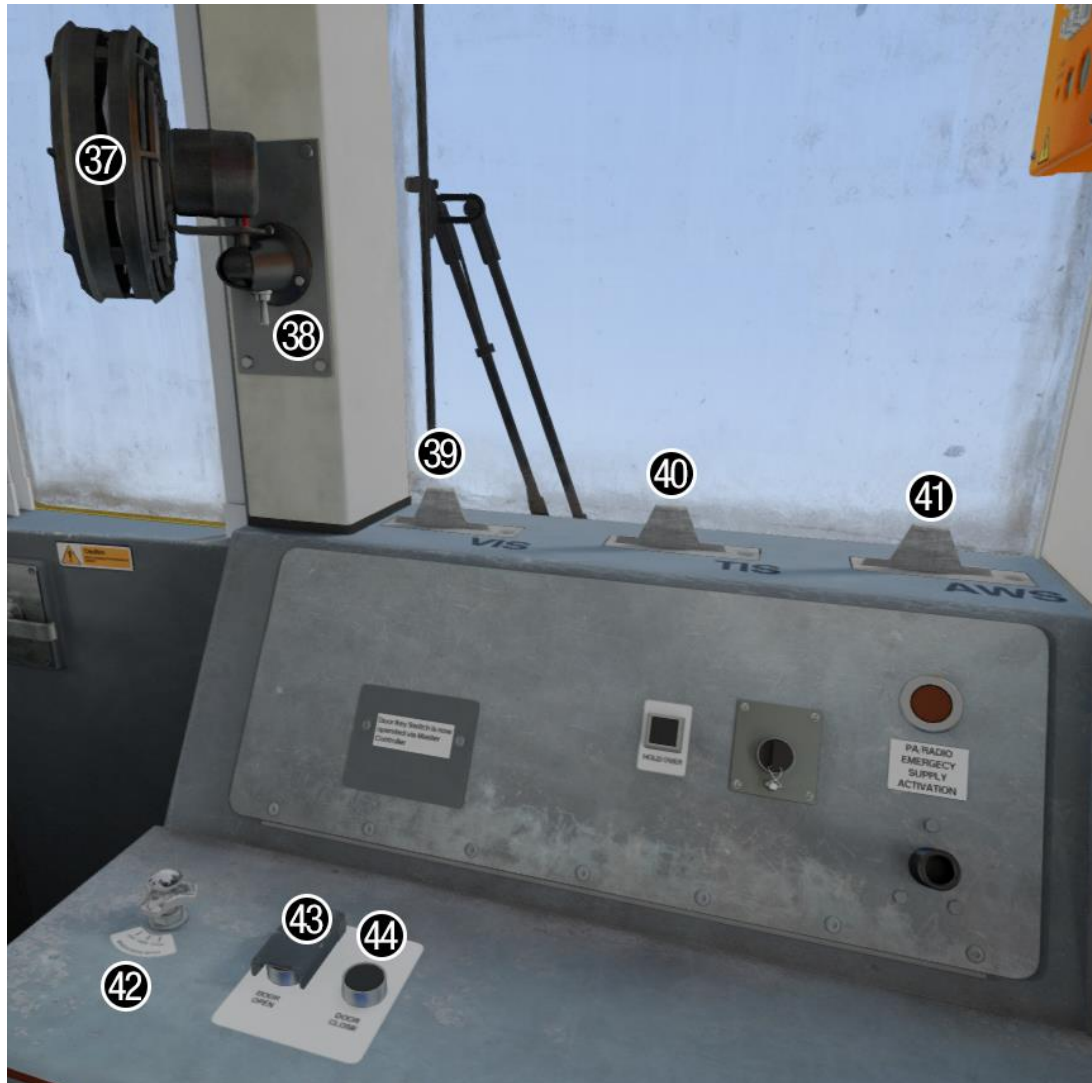

- 37 - Fan
- 38 - Fan switch
- 39 - Vigilance Isolating Switch (VIS)
- 40 - Traction Interlock Switch (TIS)

- 41 - AWS Isolating Switch (AWS)
- 42 - Windscreen wiper switch (right)
- 43 - Cab door open button (right)
- 44 - Cab door close button (right)

Back Wall

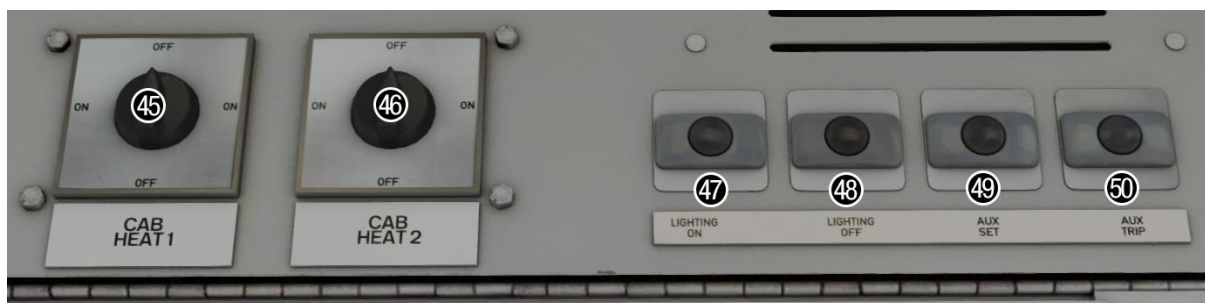

- 45 - Cab fan heater switch
- 46 - Cab radiator switch
- 47 - Saloon lighting on button

- 48 - Saloon lighting off button
- 49 - Auxiliaries set button
- 50 - Auxiliaries trip button

Keyboard Controls

Non-standard keyboard controls are listed below:

Z -	Auxiliaries set button
Ctrl+Z -	Auxiliaries trip button
L -	Cab light button ON/OFF
E -	Deadman's pedal (DVD reset)
R -	Door close button
U -	Door release buttons (left)
O -	Door release buttons (right)
C -	Driver to guard bell
Y -	Driver reminder appliance (DRA) ON/OFF
Ctrl+D -	Driver vigilance device (DVD) ON/OFF
H -	Headlight switch CLOCKWISE
Shift+H -	Headlight switch ANTI-CLOCKWISE
Space -	Horn (low tone)
B -	Horn (high tone)
Shift+W -	Master key IN/OUT
Shift+P -	Pantograph down/DC system select button
P -	Pantograph up/traction reset button
Ctrl+R -	Passenger door operation toggle DOO/GO
Shift+M -	Saloon lighting OFF
M -	Saloon lighting ON
K -	Tail lights switch ON/OFF
Ctrl+Numpad Enter -	Visual aids ON/OFF
Shift+V -	Windscreen wiper switch LEFT
V -	Windscreen wiper switch RIGHT

Features

- 9 liveries
- 2 cab variants - 'Refurbished' & 'Northern Refurbished'
- [2 passenger view variants](#)
- [Sub-class differences](#)
- [2 pantograph variants](#)
- Nameplates for First Capital Connect, Ex-Southern & Thameslink White
- Detailed internal & external audio
- Accurate acceleration & braking physics
- [Destination roller blind](#)
- [TrainFX destination display](#)
- [Global System for Mobile Communication - Railway \(GSM-R\)](#)
- [Driver only operation \(DOO\)](#)
- [Wheelslip Protection \(WSP\)](#)
- [Neutral section functionality](#)
- [Dual voltage functionality](#)
- [Isolation switches](#)
- [Coupling procedure](#)
- [Cold start option](#)
- Opening cab doors
- Automatic unit numbering
- [Bits and Bobs](#)

Passenger View

Two main variants of passenger view are included. The first with 'as-built' seats and the second with sub-class 319/2 'Chapman' seats and tables. On top of this, correct seat moquettes are offered with each livery.

First Capital Connect / Ex-Southern / 'My Switzerland' / 'Lyca Mobile' / Thameslink



London Midland



Northern Rail / Northern White



Northern



Sub-class Differences

Many of the differences between each sub-class have been simulated and are automatically applied depending on the number of the unit. Please see below for the main characteristics of each sub-class:

Class 319/0

- No first class.

Class 319/2

- Extended first class in the DTCO.
- Additional windows on TSOL for disabled toilet.
- 'Chapman' /2 seats and tables.

Class 319/3


- No first class.
- Additional front-end object deflector.
- 'Ding' style driver to guard bell compared to the 'ring' of other sub-classes.

Class 319/4

- First class.

Pantographs


Class 319s use either the Stone Faiveley AMBR or Brecknell Willis high speed pantograph. Both of these are provided and are automatically applied to each individually numbered unit as per reality.

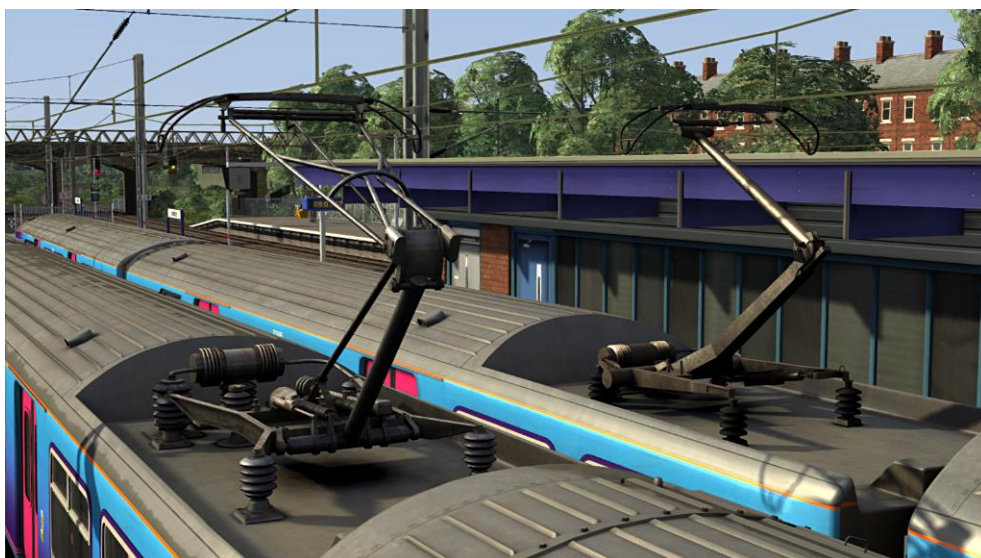

Left - Stone Faiveley AMBR

Right - Brecknell Willis high speed

Destination Roller Blind

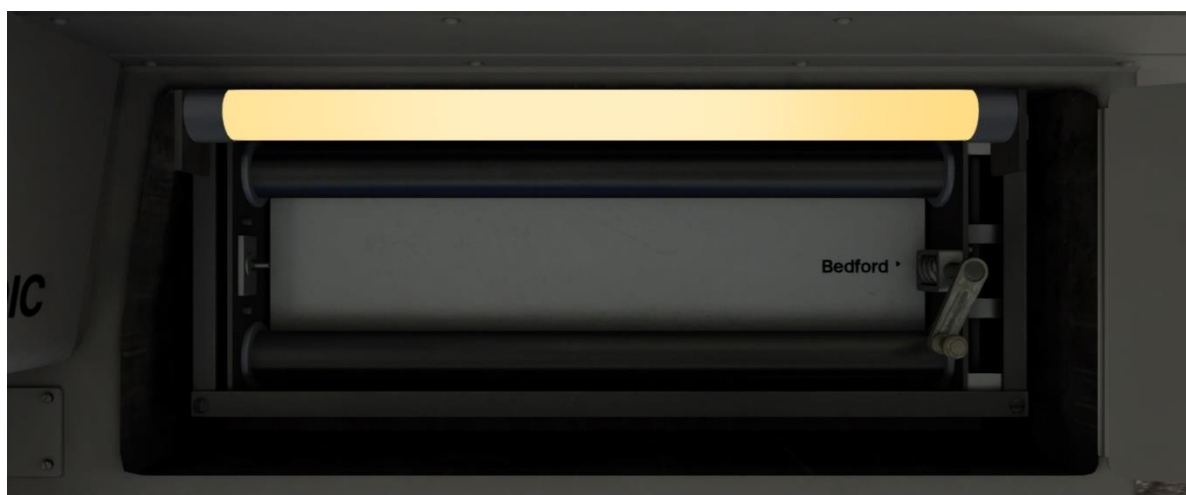

The destination blind can be manually changed within the cab. To do this, open the cupboard door above the driver's desk, place the mouse over the crank and then click and drag in the direction you wish to move it. The further you drag, the faster the blind will wind. Once finished, close the cupboard door.

Please see below for a list of the available destinations and their relevant code if you wish to use them via the unit's number on an AI service:

a - Bedford	s - Farringdon	K - Dorking
b - St Pancras	t - City Thameslink	L - Epsom
c - Moorgate	u - Blackfriars	M - Epsom Downs
d - Brighton via Gatwick Airport	v - Elephant & Castle	N - Selhurst
e - London Bridge	w - Cricklewood	O - West Croydon
f - East Croydon	x - Kentish Town	P - Smitham
g - Redhill	y - Sevenoaks	Q - Caterham
h - Gatwick Airport	z - Orpington via Denmark Hill	R - Tattenham Corner
i - Three Bridges	A - Orpington via Herne Hill	S - Horsham
j - Haywards Heath	B - Flitwick	T - Guildford
k - Preston Park	C - Leagrave	U - Kings Cross Thameslink
l - Luton	D - Harpenden	V - Victoria via East Croydon
m - St. Albans City	E - Brighton via East Croydon	W - Watford Junction
n - Wimbledon	F - West Hampstead	X - Rugby
o - Wimbledon via Sutton	G - Kent House	Y - Not in Service
p - Sutton	H - Beckenham Junction	Z - Blank
q - Sutton via Mitcham Junction	I - Bromley South	
r - Sutton via Wimbledon	J - Victoria	

TrainFX Destination Display



For Thameslink White (PRM), London Midland, Northern Rail, Northern & Northern White liveries, an electronic destination display is provided instead of the roller blind. This is controlled via the 'TrainFX' system to the left of the driver's window. Instructions for this system's use can be found below:

- 1) If a destination is already set, navigate to 'Terminate Route' by clicking ↓ and click ✓.
- 2) Using the number keys, enter the four digit route code and click ✓.
- 3) Confirm the route by pressing ✓. If you would like to return to the previous screen, click x.

Please see below for a list of the available destinations on each livery and their relevant code. The numerical code is what you need to input into the 'TrainFX' and the letter is if you wish to control the destination via the unit's number on an AI service:

Thameslink White

0100/a - Bedford	0118/s - Farringdon	0136/K - Dorking
0101/b - St Pancras	0119/t - City Thameslink	0137/L - Epsom
0102/c - Moorgate	0120/u - Blackfriars	0138/M - Epsom Downs
0103/d - Brighton via Gatwick Airport	0121/v - Elephant & Castle	0139/N - Selhurst
0104/e - London Bridge	0122/w - Cricklewood	0140/O - West Croydon
0105/f - East Croydon	0123/x - Kentish Town	0141/P - Smitham
0106/g - Redhill	0124/y - Sevenoaks	0142/Q - Caterham
0107/h - Gatwick Airport	0125/z - Orpington via Denmark Hill	0143/R - Tattenham Corner
0108/i - Three Bridges	0126/A - Orpington via Herne Hill	0144/S - Horsham
0109/j - Haywards Heath	0127/B - Flitwick	0145/T - Guildford
0110/k - Preston Park	0128/C - Leagrave	0146/U - Kings Cross Thameslink
0111/l - Luton	0129/D - Harpenden	0147/V - Clapham Junction
0112/m - St. Albans City	0130/E - Hendon	0148/W - Watford Junction
0113/n - Wimbledon	0131/F - West Hampstead	0149/X - Rugby
0114/o - Wimbledon via Sutton	0132/G - Kent House	0998/Y - Not in Service
0115/p - Sutton	0133/H - Beckenham Junction	0999/Z - Blank
0116/q - Sutton via Mitcham Junction	0134/I - Bromley South	
0117/r - Sutton via Wimbledon	0135/J - Victoria	

London Midland

0100/a - London Euston	0105/f - Bletchley	0110/k - Birmingham International
0101/b - Wembley Central	0106/g - Milton Keynes Central	0111/l - Birmingham New Street
0102/c - Watford Junction	0107/h - Northampton	0112/m - Special
0103/d - St Albans Abbey	0108/i - Rugby	0113/n - Not in Service
0104/e - Tring	0109/j - Coventry	0114/o - Blank

Northern Rail / Northern / Northern White

0100/a - Blackpool North	0104/e - Manchester Piccadilly	0108/i - Wigan North Western
0101/b - Liverpool Lime Street	0105/f - Manchester Victoria	0109/j - Special
0102/c - Liverpool South Parkway	0106/g - Preston	0110/k - Not in Service
0103/d - Manchester Airport	0107/h - Warrington Bank Quay	0111/l - Blank

Global System for Mobile Communication-Railway (GSM-R)



Beginning in 2013 and completed by 2016, Global System for Mobile Communication - Railway, more commonly known as GSM-R, replaced the existing National Radio Network (NRN) & Cab Secure Radio (CSR) systems. This communication system and its accompanying unit has been simulated to the best of our ability within the simulator. Please see below for how to register & deregister your train:

Registering

- 1) Move the reverser away from 'Off' or hold down either the 'Registration' or 'Accept' button for 5 seconds. The GSM-R unit will begin a boot up sequence.
- 2) When 'GSM-R GB' appears, the unit has successfully booted.
- 3) Press the 'Registration' button in the top right-hand corner.
- 4) Using the numerical keys, insert your 4-character train reporting number (headcode), followed by the signal number you are standing at in a 3-digit format. For example, signal WH84 would require you to enter '084'. If you wish to delete a character, press the 'x' button.
- 5) Press the '✓' button.
- 6) Registration will take a moment. Once it has completed, you will hear a double beep and the train reporting number will appear in the top right-hand corner of the display.



Deregistering - Method 1

If you are closing down the driving desk, use this method.

- 1) Move the reverser to 'Off'.
- 2) Deregistration will automatically begin and you will be given the opportunity for a short moment to retain the registration by pressing the '✓' button. Simply do nothing if you would like to continue with the deregistration.
- 3) Deregistration will take a moment. Once it has completed, the train reporting number will no longer be displayed.

Deregistering - Method 2

If you wish to keep the driving desk active after deregistering, use this method.

- 1) Press the 'Registration' button in the top right-hand corner.
- 2) A prompt will appear on the unit saying 'Confirm deregister?'.
- 3) Press the '✓' button.
- 4) Deregistration will take a moment. Once it has completed, the train reporting number will no longer be displayed.

Driver Only Operation (DOO)

Full door control is featured in this pack to simulate 'DOO'. Please see below for what the relevant procedure is and how to change the type of operation whilst in-game:

Driver Only Operation (DOO)

- 1) Open the doors by pressing **T+U** (left-hand side) or **T+O** (right-hand side). Alternatively, you can click the corresponding red buttons in the cab which have arrows pointing to the side the doors will open.
- 2) If at a platform, wait for the 'Platform Duties Complete' message to appear in the top-right corner and press **R** to close the doors. If not at a platform, press **R** whenever you wish.
- 3) Once the door interlock light illuminates, you may depart.

Guard Operation (GO)

- 1) Open the doors by pressing **T**.
- 2) Doors will be closed by the guard once passengers have finished boarding/alighting.
- 3) Once the door interlock light illuminates, the guard will give you two bells which you must acknowledge by also giving two bells. This can be carried out by pressing **C** twice.

How to Change Operation

This can be changed in-game by pressing **Ctrl+R** which will produce a visual message in the top-right hand corner of the screen to let you know which option you have selected.

Adhesion

Adhesion between a train's wheels and the rails plays a big part in allowing a train to accelerate or brake. Too little of it and the train will slip or slide. There are a myriad of factors that control the level of adhesion and we have attempted to simulate the most important of these to give a varied and realistic driving experience:

Season

Adhesion is generally good in dry conditions during summer and spring. Slightly decreased adhesion during winter to take account of the increased amount of moisture and possible ice on the rails due to cooler temperatures. Much decreased adhesion during autumn due to leaf mulch.

Weather

Adhesion decreases in wet weather, especially so when rain first starts falling before it has had a chance to clean the railhead. If rain is light, it will take longer for the railhead to be cleaned whereas heavy rain will clean it quicker, resulting in adhesion recovering sooner.

When using the drizzle weather pattern in our Sky & Weather Enhancement Pack, adhesion is particularly poor as the rain hasn't enough force to clean the railhead but still makes it sufficiently wet to worsen adhesion.

Time of Day

Adhesion will decrease somewhat after dusk as the air cools and dew is more likely to form on the railhead. This persists throughout the night until around an hour after sunrise when higher temperatures or the sun dry it out. In our simulation, this factor is reduced during summer to account for warmer temperatures, which on average result in less dew.

Tunnels

When adhesion is poor due to external factors such as weather or season, adhesion will generally improve upon entering a tunnel, which is not as susceptible to these factors. When adhesion is good during dry weather and outside of autumn, adhesion may decrease a little upon entering a tunnel due to their damp nature.

Wheelslip

Wheelslip protection aids the driver when powering or braking during times of poor adhesion.

When wheelslip is encountered during acceleration, a two-stage process takes place:

- 1) The motors can be heard rising rapidly in pitch and power quickly falls to control the slip.
- 2) The motors revert to their normal pitch and power returns to the notch selected on the power handle.

As a driver, you must assess which power notch is most suitable for the conditions and balance the occurrence of wheelslip with the maximum possible rate of acceleration.

Wheelslide

When wheelslide is encountered during braking, a two-stage process takes place:

- 1) Brake pressure is automatically reduced to try and control the slide.
- 2) Once the slide stops, brake pressure is returned to the notch selected on the brake handle. If wheelslide reoccurs, the process starts again.

As a driver, you must resist the temptation to reduce the brake yourself as the wheelslip protection will offer the best braking performance.

Neutral Section Functionality

The class 319 will react to the neutral sections available on the WCML Over Shap route. On top of this, they will also function with the neutral sections present in the six included scenarios. These have been placed using our own markers and signage which are available in the 'AP/Common' object set filter folder.

Dual Voltage Functionality

Follow the instructions below to change the power source from AC (overhead wires) to DC (third rail) and vice versa.

AC to DC

- 1) Ensure the reverser is in 'Neutral'.
- 2) Press the 'Pan Down/DC System Select' button and ensure it illuminates.
- 3) Press the 'Pan Up/Traction Reset' button.
- 4) If the line light is illuminated, you have successfully changed to DC.

DC to AC

- 1) Ensure the reverser is in 'Neutral'.
- 2) Press the 'AC System Select' button and ensure it illuminates.
- 3) Press the 'Pan Up/Traction Reset' button.
- 4) If the line light is illuminated, you have successfully changed to AC.

Variable Power & Brake Performance

Any train driver will tell you that especially on older stock, braking and power performance can vary quite noticeably from unit to unit, despite being within the same class. We have simulated this variance by randomly allocating a 'Brake Factor' & 'Power Factor' every time you drive a unit in the simulator. This factor can reduce or increase performance by a maximum of 8% either way. There is no way of finding out what factor your unit has been allocated except for assessing its 'feel' when powering or braking; just like a real driver!

Variable Traction Motor Volume

Class 319s are known for their loud traction motors but in reality, some are louder than others. To simulate this, we have implemented a random 'Motor Factor' to each motor bogie which ranges from 1 to 6; 1 being the quietest and 6 being the loudest. This can not be changed by the player.

Thrash Mode

If you are someone who likes to enjoy the passenger view as if the windows are open, you are in luck! We have provided a 'Thrash Mode' which simulates just this so you can listen to those traction motors in all their glory. This can be turned on and off by pressing **Ctrl+T**.

Isolation Switches



Isolation switches allow safety systems to be isolated in the event of a failure or emergency and these have been simulated. To activate one, you must first insert a master key into the corresponding lock and click the relevant flag. Please see below for a list of what each flag does:

- **EBS (Emergency Bypass Switch)** - Disables emergency brake.
- **VIS (Vigilance Isolating Switch)** - Disables the DVD (Driver Vigilance Device).
- **TIS (Traction Interlock Switch)** - Disables the traction interlock so you can obtain power without door interlock.
- **AWS (AWS Isolating Switch)** - Disables the AWS (Automatic Warning System).

Coupling Procedure

Please see below for how to couple to another unit in a realistic manner:

- 1) Approach the unit you are going to couple to at caution and come to a stop just short of it.
- 2) Select 'Notch 1' power and ease up to the unit. As soon as you have coupled, apply 'Step 3' brake and return the power handle to 'Off'.
- 3) To ensure the coupling is secure, you must perform a 'pull-away' test. To do this, select 'Reverse' on the reverser, 'Step 1' brake and apply 'Notch 1' on the power handle for a few seconds. If you do not move, the coupling has been successful.
- 4) Hold the 'Couple' button down on the cab desk for 5 seconds. This will connect the two units' air and electrical systems.

Arcing Pantograph



Special attention has been given to simulating arcing between the pantograph and overhead wire.

From one hour after sunrise to one hour after sunset on a dry day, there is only light arcing.

From one hour after sunset to one hour after sunrise, there is moderate arcing to simulate the moisture that tends to build up on the overhead wire once night falls. There is also moderate arcing when raining at any time of day.

During the winter, from one hour after sunset to one hour after sunrise, there is heavy arcing to simulate ice/frost that tends to build up on the overhead wire once night falls. There is also heavy arcing when snowing at any time of day during the winter.

Finally, arcing becomes more frequent as you gain speed.

When arcing, you will visually see it on the pantograph which illuminates the area around it to a varying degree with each arc. Please note that the illumination of the surrounding area will only occur after sunset and before sunrise. This is to avoid the unrealistic appearance of projected light in broad daylight.

You will also audibly hear it if the arcing is moderate or heavy.

Cold Start

'Cold Start' means the unit is in the following state when it loads:

- Main reservoir, brake cylinder pressures are 0.
- Auxiliaries are tripped
- Pantograph is down
- Saloon lighting is off

To prepare a unit from cold, please follow the instructions below:

- 1) Hold the 'Aux Set' button down on the back wall of the cab for 5 seconds.
- 2) Turn the master key in by pressing **Shift+W**.
- 3) Move the reverser to 'Neutral' by pressing **S**.
- 4) Acknowledge the AWS self-test by pressing **Q**.
- 5) Press either the 'AC System Select' or 'DC System Select' button depending on whether you are below overhead wires (AC) or on the third rail (DC).
- 6) Press the 'Pan Up/Traction Reset' button. If on DC, power will be fed to the train and you will hear the main compressor activate. If on AC, the auxiliary compressor in the MSO will need to build up the air pressure to 5 bar before the pantograph can be raised. You can obtain updates on how this is progressing by pressing the 'Pan Up/Traction Reset' button. Once 5 bar has been reached, press 'Pan Up/Traction Reset' button and the pantograph will raise. Power will be fed to the train and you will hear the main compressor activate.
- 7) You must now wait for the main reservoir pressure to build to 6.5 bar. Once it has done so, you will be able to obtain a brake release.
- 8) If heading out in passenger service, turn the saloon lighting on by pressing **M** or the 'Lighting On' button on the back wall of the cab.

After carrying out this procedure, your unit will be successfully prepared from cold.

Bits and Bobs

This section is dedicated to aspects of this pack that don't warrant a dedicated section but are still of note:

- Power cannot be applied if the brake handle is in 'Step 2', 'Step 3' or 'Emergency'.
- If the brake handle is placed in 'Step 2', 'Step 3' or 'Emergency' whilst powering, power will be lost and you must return the power handle to 'Off' before being able to regain power.
- 1 second delay between train passing over AWS magnet and AWS warning sound occurring. The F3/F4 HUD will show the warning immediately so you must wait 1 second before trying to cancel it.
- The headlights and destination blind lights only provide illumination before sunrise and after sunset. This is to avoid the unrealistic appearance of projected light in broad daylight.
- Units not fitted with a wind block have a whistling sound in the cab at speed.
- Compressor momentarily rises in pitch when taking power; just like the real thing
- A special 'bogie cam' is available if you switch to the right-hand 'head-out' view (**Shift+2 THEN Right Arrow**)
- London Midland, Northern Rail, Northern & Northern White liveries do not have a third rail shoe.

Setting up the Driver's Cab

Please follow the steps below to set up the cab so you are ready to move:

- 1) Ensure the master key is turned in. If not, press **Shift+W**.
- 2) Ensure the reverser is in 'Neutral'. If not, press **S** and acknowledge the AWS self-test by pressing **Q**.
- 3) Turn off the tail lights by pressing **K**.
- 4) Turn on the headlights by pressing **H**.
- 5) If applicable, register the GSM-R.
- 6) If necessary, change the destination blind/display.
- 7) Check the door interlock light is illuminated.
- 8) If you have a proceed signal aspect, turn off the Driver's Reminder Appliance (DRA) by pressing **Y**.

You should now be ready to move off. For information on this, please see below.

Driving Guide

The following steps should allow you to drive in a realistic and safe manner:



- 1) Move the reverser to your desired direction of travel by pressing either **W** for 'Forward' or **S** for 'Reverse'.
- 2) Move the brake handle to 'Step 1' by pressing **;**.
- 3) Move the power handle to 'Notch 2' by pressing **A**. At the same time, move the brake handle to 'Release' which will ensure you depart without rolling back.
- 4) From then on, increase power as you see fit.
- 5) To brake the train, you may make applications and releases by moving the handle between 'Step 1' and 'Full Service'. It is recommended you only use 'Full Service' as a last resort so as to ensure you always have more brake force available if required.
- 6) Just before coming to a stop, aim to have the brakes in 'Step 1' so as to provide a smooth stop.

How to Use in the Scenario Editor

How to place

To place in the scenario editor, please follow the instructions below:

- 1) In the left-hand rolling stock fly-out, click the object set filter which looks like a blue box with an orange arrow to the right of it.
- 2) Go to the right-hand fly-out which should have appeared. Select 'AP' from the drop-down menu.
- 3) Tick the second & third box beside 'Class319Pack01'.
- 4) The liveries should now be visible in the left hand rolling stock fly-out.

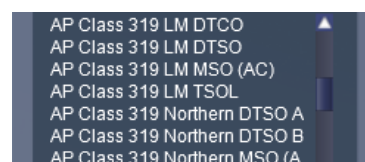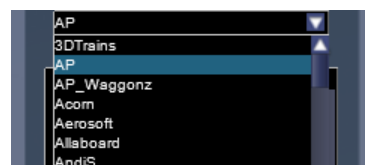

Formation

319/0, /3 or /4: DTCO + MSO + TSOL + DTSO

319/2: DTCO + TSOL + MSO + DTSO

Numbering

When placing in the scenario editor, you are able to control a number of features via the number of the unit. Please note that for the unit number itself, the only number you need to change is the MSO's, as other vehicles in the consist will automatically be numbered correctly.

Destination

To apply a pre-set destination to a unit, you must change the first letter of the MSO number. Depending on the livery, see the 'Destination Roller Blind' or 'TrainFX Destination Display' sections of this manual for the relevant letter.

GSM-R

To restrict the train reporting number and signal number that the player can use to register with on the GSM-R, add ';GSMR=1A22084' to the leading drive vehicle. In this example, '1A22' is the train reporting number and '084' is the signal number.

Logos

You can control the logo shown on a whole unit by adding ';L=x' to the MSO number. Removing ';L=x' will remove all logos. Please see what to put as 'x' to receive your desired result on each livery:

- First Capital Connect, Ex-Southern & Thameslink White: 'FCC' = First Capital Connect. 'TL' = Thameslink.
- London Midland: 'LM' = London Midland.
- Northern Rail: 'NE' = Northern Electrics
- Northern: 'NR' = Northern by Arriva

Door buttons

You can control the type of door buttons fitted by adding ';D=x' to the MSO number:

- Old: x = old
- New: x = new

Pantograph

You can control the type of pantograph fitted by adding ';Pa=x' to the MSO number:

- Stone Faiveley AMBR: x = old
- Brecknell Willis high speed: x = new

Power mode

You can control the default power mode of a unit by adding ';P=x' to the MSO number:

- AC (overhead wires): x = AC
- DC (third rail): x = DC

Wind block

To add the wind block around the centre door of the cab, add ';W=1'.

Cold start

To activate cold start mode on a player train, add ';Cold=1' to the number of the DTCO or DTSO which has the driver icon applied to it.

Reversing motor whine

When changing direction, the motors will make a distinctive high pitch whining sound that slowly fades away over time. After one reversal, this sound activates automatically but to enable it at the start of a scenario, add ;RW=1 to the MSO number. This is mostly intended to be used when a scenario starts at a terminus.

Example MSO number

Z319363;L=FCC;D=new;Pa=new;P=DC;W=1

Key:

Z - Destination

319363 - Unit number

;L=FCC - First Capital Connect logo

;D=new - New door buttons

;Pa=new = Brecknell Willis high speed pantograph

;P=DC - DC power is default power mode

;W=1 - Wind block

Scenarios

APC319: 1G61 18:20 Elephant & Castle - Bedford

Route = MML - London St. Pancras to Bedford
Track covered = St. Pancras - Bedford
Traction = Thameslink 319430 & Ex-FCC 319441
Year = 2015
Duration = 1 hour 5 minutes



APC319: 1J88 07:58 Bedford - Elephant & Castle

Route = MML - London St. Pancras to Bedford
Track covered = Bedford - St. Pancras
Traction = 'My Switzerland' 319215 & 'Lyca Mobile' 319218
Year = 2014
Duration = 55 minutes



APC319: 2E85/5H85 12:00 Sevenoaks - Luton

Route = MML - London St. Pancras to Bedford
Track covered = St. Pancras - Luton
Traction = Ex-First Capital Connect 319449
Year = 2015
Duration = 50 minutes



APC319: 2V19 07:30 Luton - Sutton

Route = MML - London St. Pancras to Bedford
Track covered = Luton - St. Pancras
Traction = Ex-First Capital Connect 319458 & 319448
Year = 2015
Duration = 50 minutes



APC319: 2V44 12:08 Sutton - St. Albans City

Route = MML - London St. Pancras to Bedford
Track covered = St. Pancras - St. Albans City
Traction = Ex-Southern 319009
Year = 2014
Duration = 40 minutes



APC319: 3J73 13:50 Bedford C.S. - Bellingham Siding

Route = MML - London St. Pancras to Bedford
Track covered = Bedford C.S. - St. Pancras
Traction = Thameslink 319214 & 319372
Year = 2016
Duration = 1 hour 10 minutes



Credits

Jordi Blumberg - Modelling & texturing

Nicolas Schichan - Scripting

Thameslink - Assistance in recording sounds